


## ALP PRODUCT BULLETIN – Utility Lift System

For applications using the ALP Utility Lift System in which the actual applied load exceeds a standard 7 Ton (14,000 lbs.) forged Eye Hook or Shackle, an ALP Supply 8-12 Ton QuikLift Ring Clutch (QL003) may be used to achieve the maximum rated capacities for Utility Lift Anchors as highlighted below.

ALP Supply 8-12 Ton QuikLift Ring Clutch (QL003) meets and/or exceeds the 5:1 Factor of Safety as specified by OSHA 29 CFR 1926.704

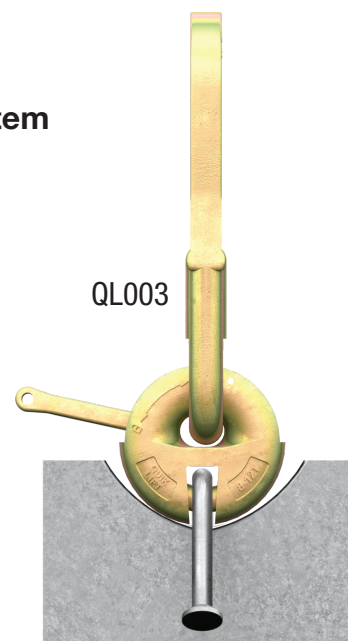

UTILITY LIFT ANCHOR LOAD CHART

Part Number	Slab Min. Thickness	Edge Distance	ALLOWABLE LOAD ZONE	
			4:1 SWL at 90° Tension (lbs)	4:1 SWL at 90° Shear (lbs)
LUA66G	5-5/8"	12"	7,320	15,780
LUA86G	7-5/8"	16"	10,830	18,850

UTILITY LIFT ANCHOR LOAD CHART

Part Number	Slab Min. Thickness	Edge Distance	ALLOWABLE LOAD ZONE	
			4:1 SWL at 90° Tension (lbs)	4:1 SWL at 90° Shear (lbs)
LUL818G	8"	15-1/2"	13,000	20,000

If you have any questions, please contact us at [tech@alpsupply.com](mailto:tech@alpsupply.com).