


**ALP® LIFTING EYE - STANDARD**

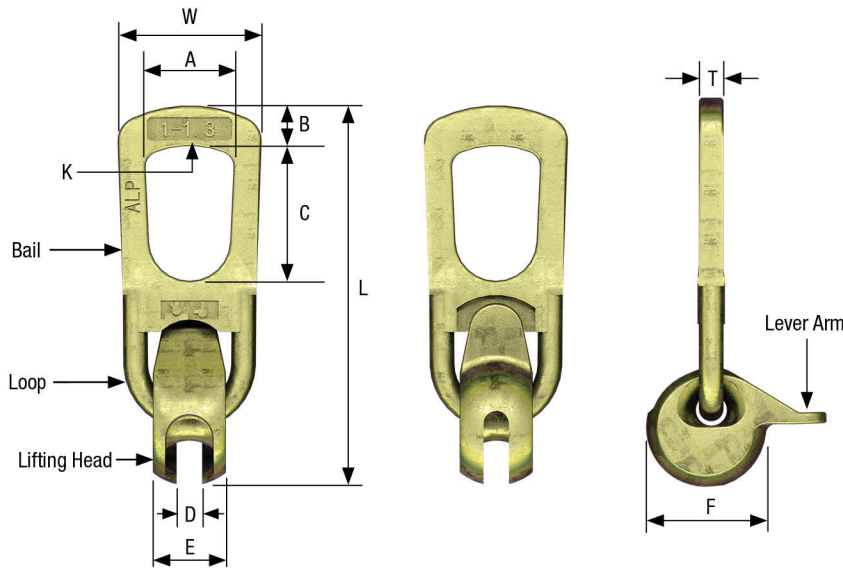

Designed as an attachment link for lifting and transport of precast concrete units in combination with the ALP® Lifting Pin Anchor System. The Lifting Eye consists of a Lifting Head with a protruding lever arm and a high strength Bail. The Lifting Head has a "T" slot that engages the head of a Lifting Pin Anchor. The rotation capabilities allow the lifting eye to stay oriented in the direction of loading without binding up.

*See pages 12 and 13 for Lifting Eye usage information.*

**See ALP Supply® website for Inspection and Maintenance Guidelines for routine inspection of lifting hardware.**

Part Number	Description	L	W	T	A	B	C	D	E	F	Weight Each (lbs)	K Load Range (Tons)	Ultimate Capacity in Tension (lbs)
LPLE1T	1T Lift Eye	7-11/32"	3"	1/2"	1-3/4"	7/8"	2-3/4"	15/32"	1-5/16"	2-1/8"	2.20	1T-1.3T	13,000
LPLE2T	2T Lift Eye	9"	3-1/2"	5/8"	2-1/8"	1"	3-3/8"	11/16"	1-5/8"	2-9/16"	3.60	1.5T-2.5T	25,000
LPLE4T	4T Lift Eye	11"	4-11/16"	11/16"	2-5/8"	1-15/32"	3-7/16"	29/32"	2-1/4"	3-3/8"	7.65	3T-5T	50,000
LPLE8T	8T Lift Eye	15-1/2"	6-1/4"	1-1/16"	3-1/8"	2"	4-3/8"	1-1/4"	2-15/16"	4-1/2"	21.70	6T-10T	100,000
LPLE20T	20T Lift Eye	20"	7-11/16"	1-3/8"	4-3/8"	2-13/16"	5-15/16"	1-11/16"	4-3/8"	5-5/8"	44.10	12T-20T	200,000

Rated load has a 5:1 safety factor.