

## QUIKLIFT™ MOUNTING HARDWARE


### QUIKLIFT™ HOLDING PLATE

QUIKLIFT™ Holding Plates are most commonly used to attach QUIKLIFT™ Recess Members to the side rail of a form. Holding plates can be nailed or screwed to the form, utilizing the furnished holes in the plate. Holding plates can also be used in wet-setting applications to keep the Recess Member closed and to cover the holes in the back of the Recess Member, keeping them clear of concrete and other debris.



#### HOLDING PLATE DIMENSIONS

Part Number	Works With Recess Member	L Length	W Width	T Thickness	D Diameter	Weight Per Piece (lbs)
QL160	QL051 QL200 QL061	2-3/4"	5/8"	5/32"	3/8"	0.13
QL144	QL062 QL072	3-1/4"	1-3/16"	5/32"	3/8"	0.25
QL111	QL121 QL771 QL791 QL063	4-7/8"	1-5/8"	5/32"	1/2"	0.52

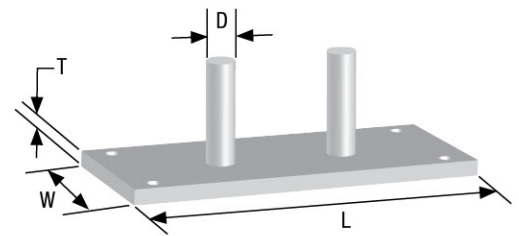


### QUIKLIFT™ HOLDING ROD

#### HOLDING ROD DIMENSIONS

Part Number	Works With Recess Member	Description	Weight Per Piece (lbs)
QL202	QL051 QL200 QL062 QL061 QL072	3/8" x 6" Holding Rod	0.25
QL131	QL121 QL166 QL771 QL791 QL063	1/2" x 6" Holding Rod	0.50

QUIKLIFT™ Holding Rods are used to secure the Recess Members to the form. They consist of a coil rod, a fixed wing nut at one end and an adjustable wing nut used to tighten the recess against the form.

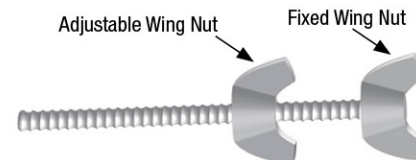

### QUIKLIFT™ FOAM

QUIKLIFT™ Foam is used in Recess Members to minimize concrete leakage and reduce clean-up time.

#### FOAM INFORMATION

Part Number	Recess Member	Quantity per Carton
QL087	2T	1,000
QL069	4T	1,000
QL091	8T	500

